Unique and innovative design
2" incremental spring plungers height adjustment innovative mechanism design provides effortless viewing level setup from 40.5" to 60.2".



Height adjustable video tray
Steel video tray holds components up to 10 lbs (4.5 kg) and able to adjust vertical freely within the slot length for perfect video conferencing position.

Adjustable AV shelf height
Adjustable plastic AV shelf holds AV components and accessories up to 10lbs (4.5 kg).

Integrated cable management system
Internal cable management allows cables and wires to be routed inside the column for clean, clutter-free look.

High tensile heavy gauge material used to construct solid base for better support, stability and rigidity !

Swivable caster brake wheels
Carts come with 2" swivable caster brake wheels provide you with easy maneuvers to any direction and position.

Heavy gauge columns constructed
Built in 2X SPCC seamless heavy gauge columns provides rigid and stable support for the full setup mass weight.

SPECIFICATIONS

TV size	Max load	VESA pattern	Tilt angles	Swivel angles	Height adjustment	Materials used
37"-65"	100lbs(45.5kg)	100*100-600*400mm	0°	0°	40.5"-60"(1030-1530mm)	SPCC seamless

LINE DIMENSIONS

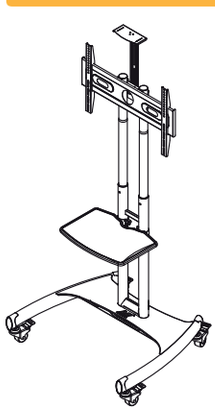

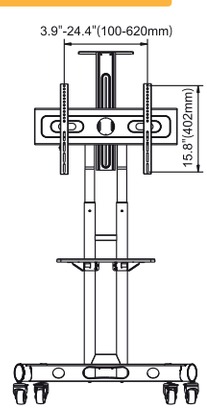

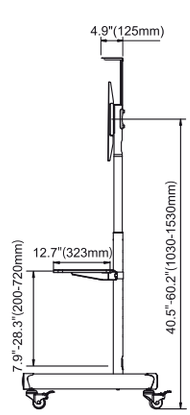



INSTALLATION INSTRUCTION

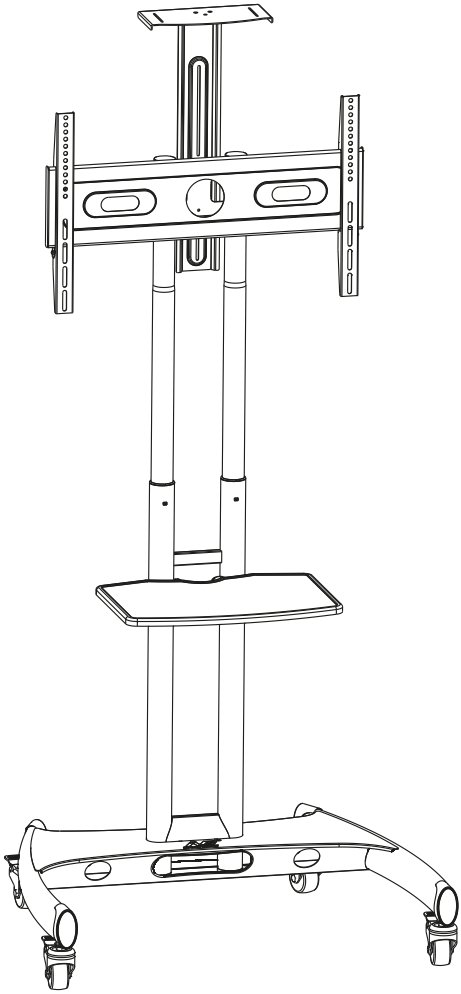

Multi-functional and professional mobile stand

For TV panels: 40″-60″

Maximum load capacity: 100 lbs / 45.5 kg

AV shelf max load: 10 lbs / 4.5 kg

Video tray max load: 10 lbs / 4.5 kg

VESA：100x100–600x400mm

We reserve the right to modify or alter instructions. No modification or alteration without formal notice.

Table of Contents

Table of Contents and Warning 2/11

Parts list 3/11

Assembly and Installation

1. 1 Castor wheels to base installation 4/11

1. 2 Post assembly to base installation 4/11

2. Install telescopic mounting poles 5/11

3. Av shelf assembly and installation 6/11

4. Installation of interface 7/11

5. Selection of TV mounting patterns 8/11

6. Mounting TV on pole interface 9/11

7. Video tray installation 10/11

8. Cables and wires installation 11/11

WARNING!

Severe personal injury and property damage can result from improper installation or assembly. Read the following warning carefully before beginning.

- If you do not understand the instructions or have any concerns or questions, please contact a qualified local installer.
- Do not install or assemble if the product or hardware is damaged or missing, if you require replacement parts, please contact your local distributor for assistance.
- This product fits most 40"-60" LCD/plasma screen; maximum weight of LCD/plasma screen:100lbs/45.5kg;AV shelf max load:10lbs/4.5kg;Video tray max load:10lbs/4.5kg.
- Do not use this product for anything other than the original design.
- This product contains moving parts, please use with caution.
- The manufacturer disclaims any liability for the modifications, improper installation, or installation over the specified weight range. The manufacturer will not be liable for any damages arising out of the use of, or inability to use, the product.

► All images are for reference, to prevail in product.

Manual

Tightening Direction	loosening Direction	Phillips Screwdriver	Metre Rule	Adjustment	By Hand	Hex Wrench

Parts List

1X

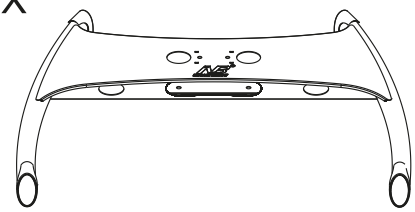

1X

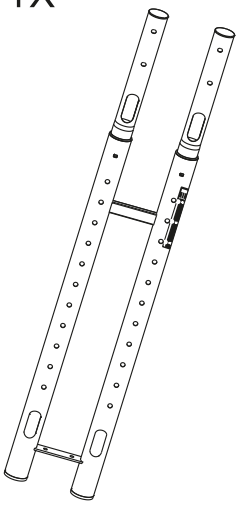

4X

1X

1X

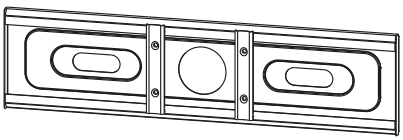

1X

1X



1X



1X



1X



1X



1X



4X

1X

2X

A1
4X

M8×25mm

B1
4X

M6×25mm

C1
4X

M5×25mm

D1
4X

Φ16×Φ6.2×1.5mm

E1
4X

Φ18×27×H14mm

A2
6X

M8×26mm

B2
4X

M8×55mm

C2
2X

M5×12mm

D2
1X



E2
4X

Φ16.5×Φ12.5×2mm

F2
1X

M6

1.1 Castor wheels to base installation

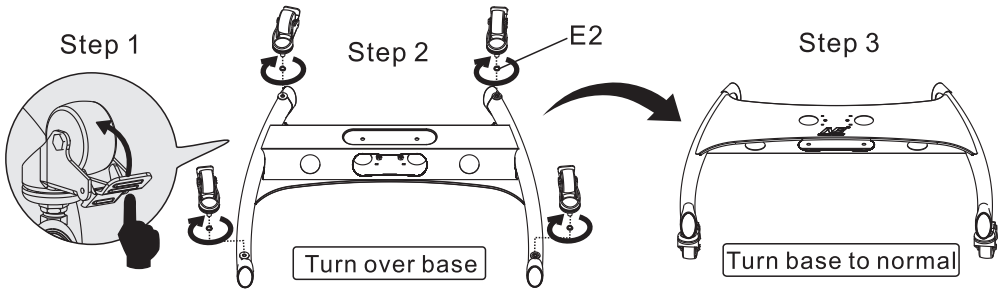

1.2 Post assembly to base installation

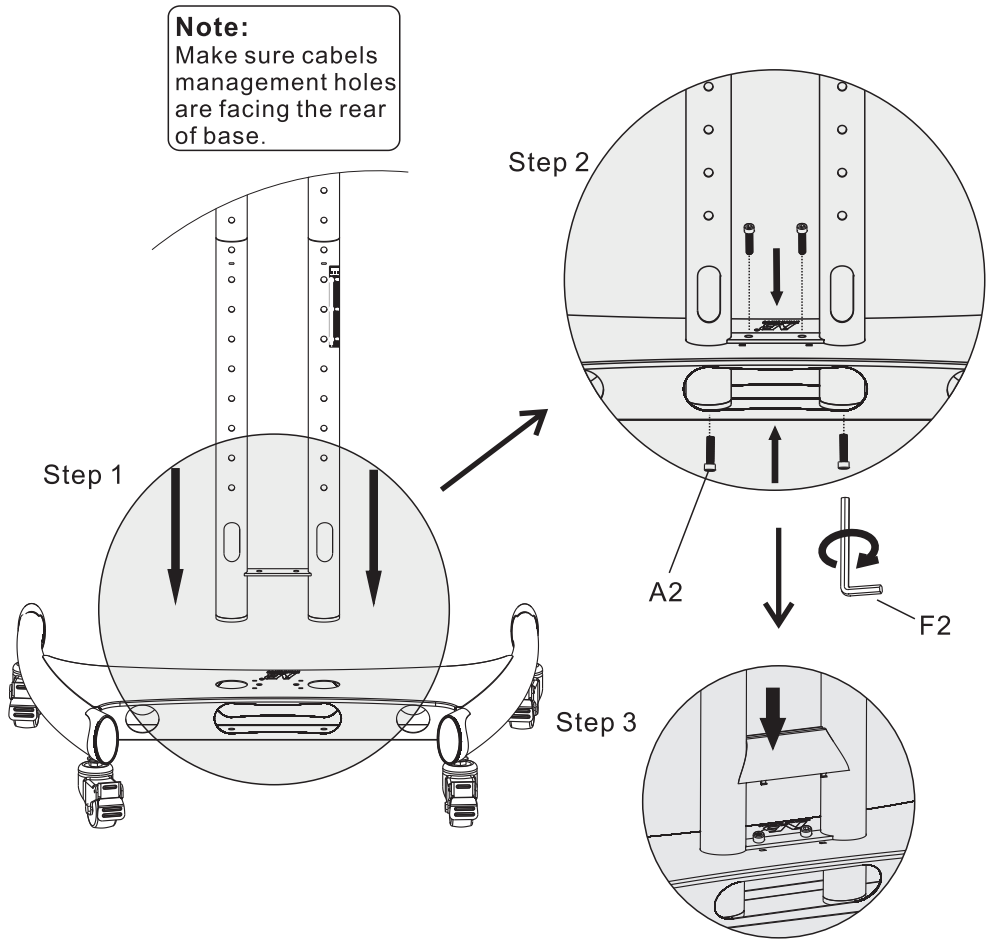

2. Install telescopic mounting poles

Step 1. Use thumb or finger to depress the right upper pole spring plunger ball located at the cable window, pull upper pole upward until your desired height. Twist upper pole toward the plunger holes direction and engage the spring ball into the plunger hole and set as shown in fig-1.

Step 2. Repeat with left pole.

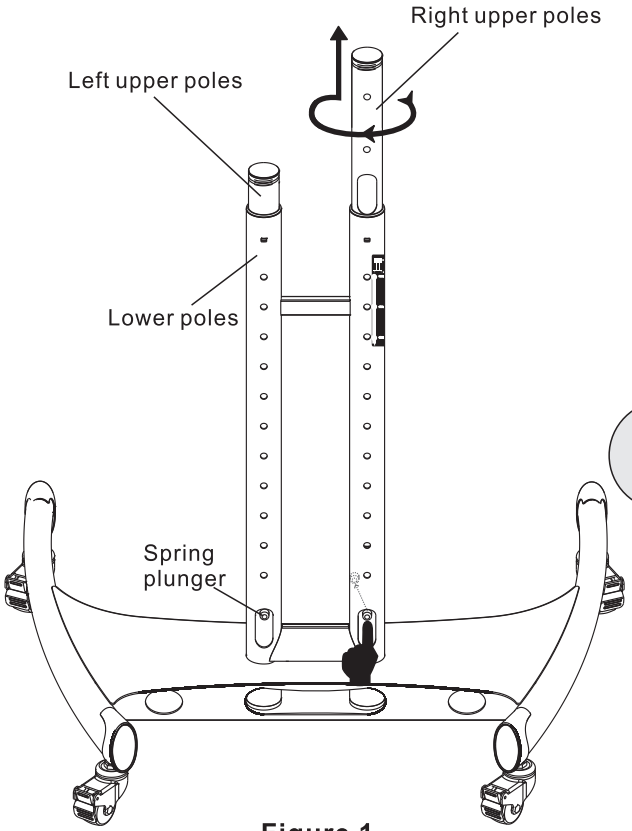

Figure 1

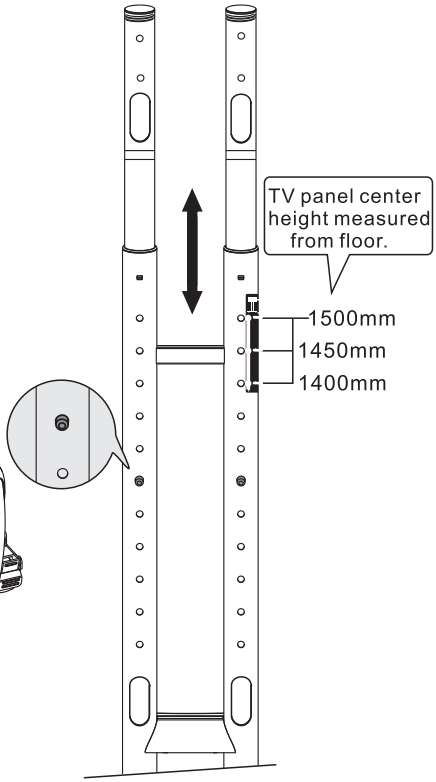

Figure 2

3. AV shelf assembly and installation

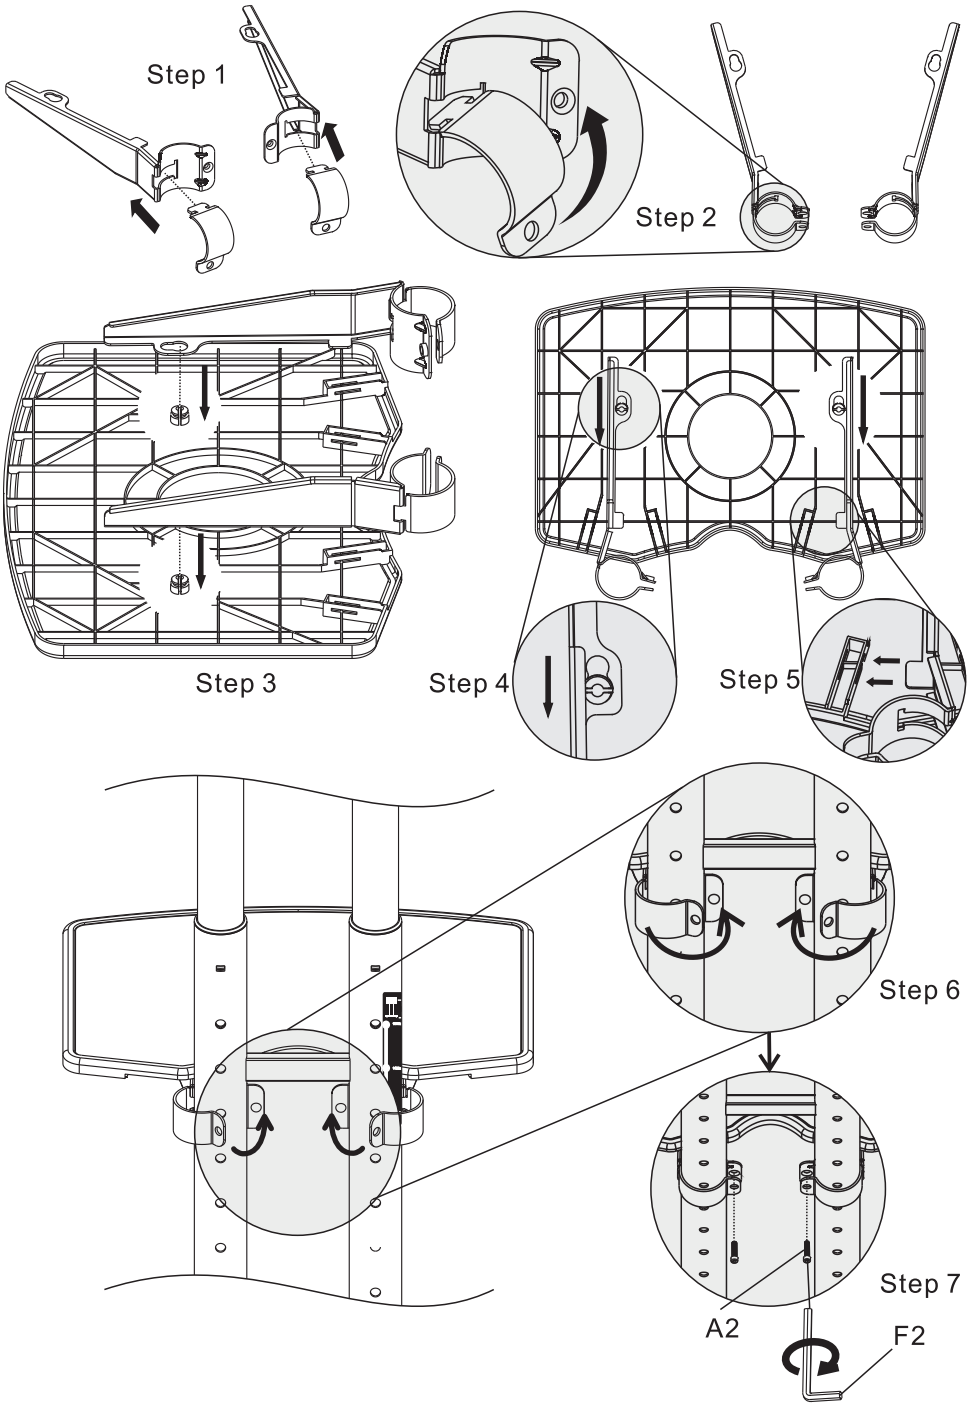

4. Installation of interface

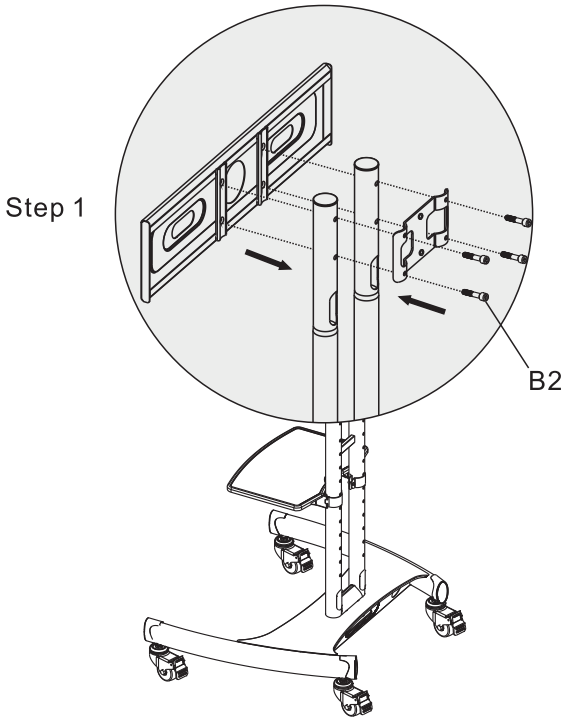

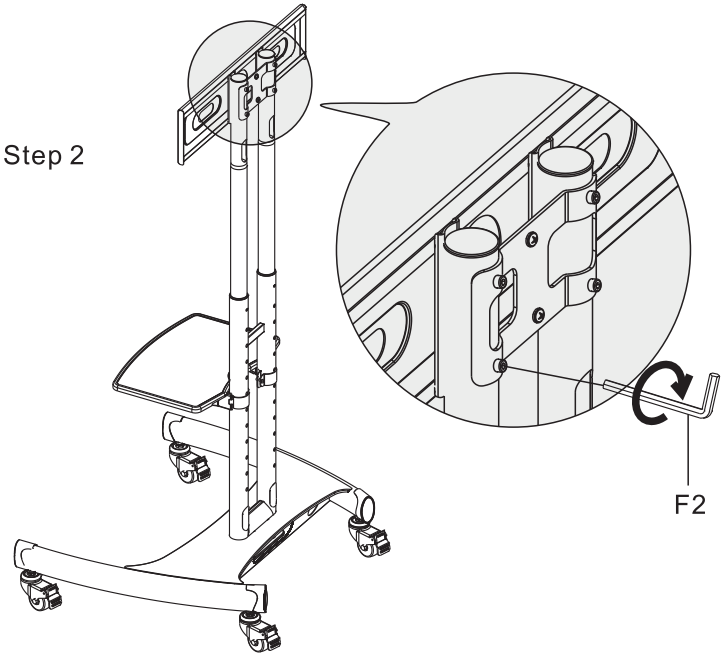

5. Selection of TV mounting patterns

VESA：100x100～600x400mm

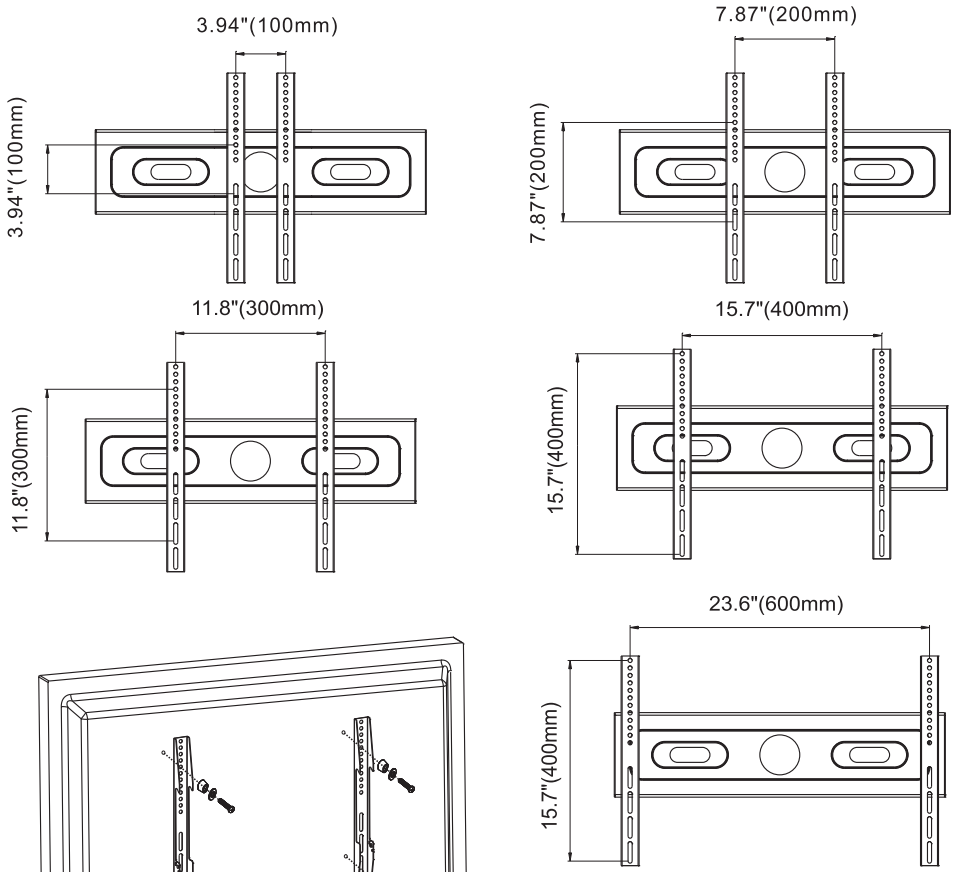

Note:
To avoid damage plastic spacer must be used when depth of mounting holes is minimal.

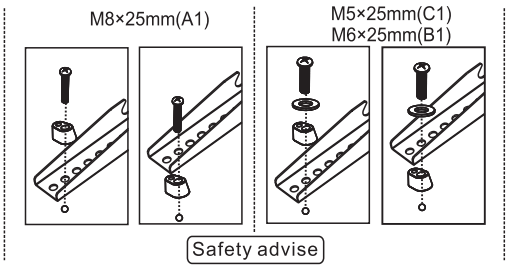



6. Mounting TV on pole interface

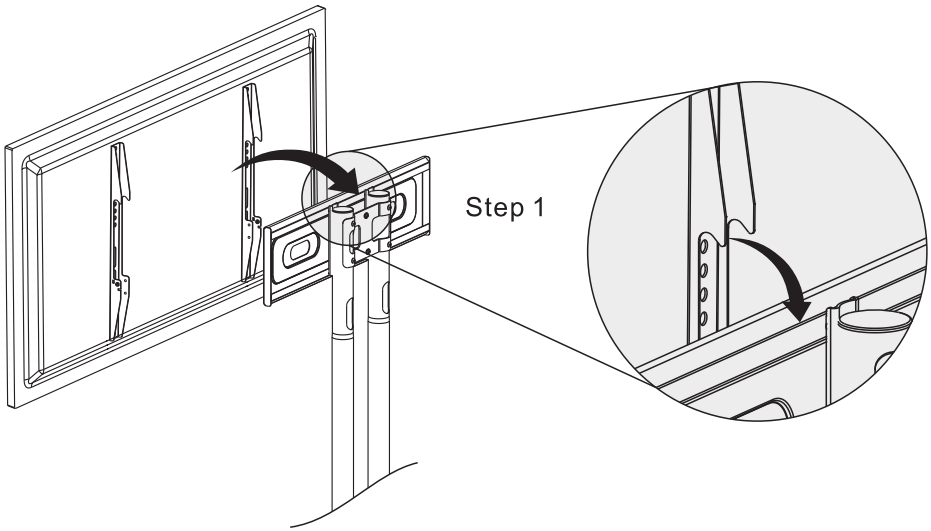

Step 2

Note:
Moves TV to center.

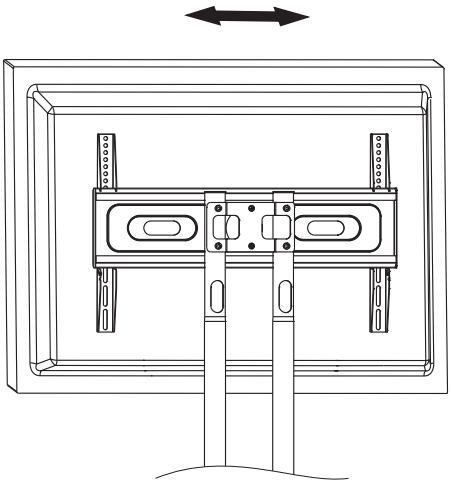

Step 3

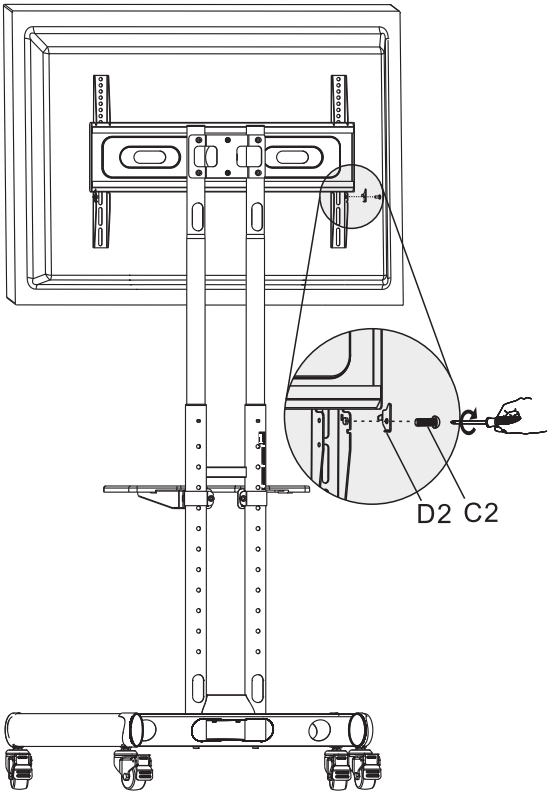

7. Video tray installation

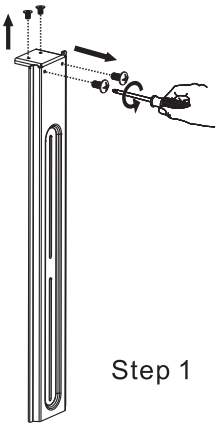

Step 1

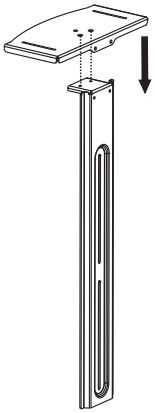

Step 2

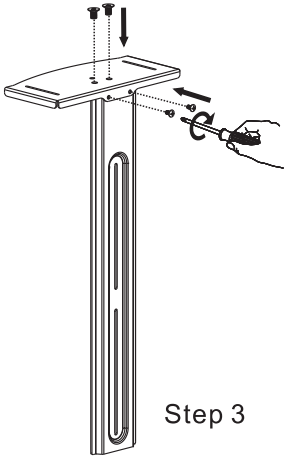

Step 3

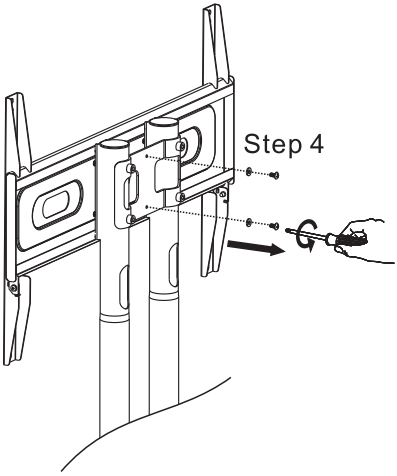

Step 4

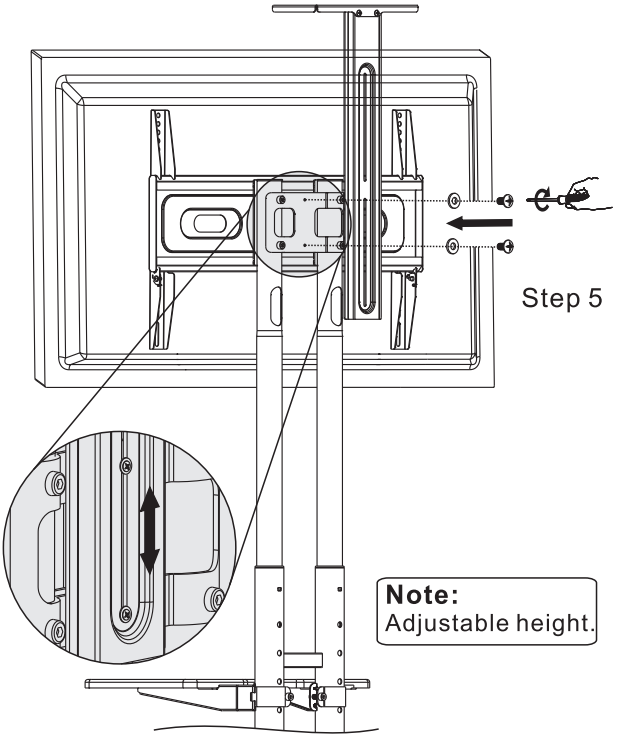

Step 5

Note:
Adjustable height.

8. Cables and wires installation

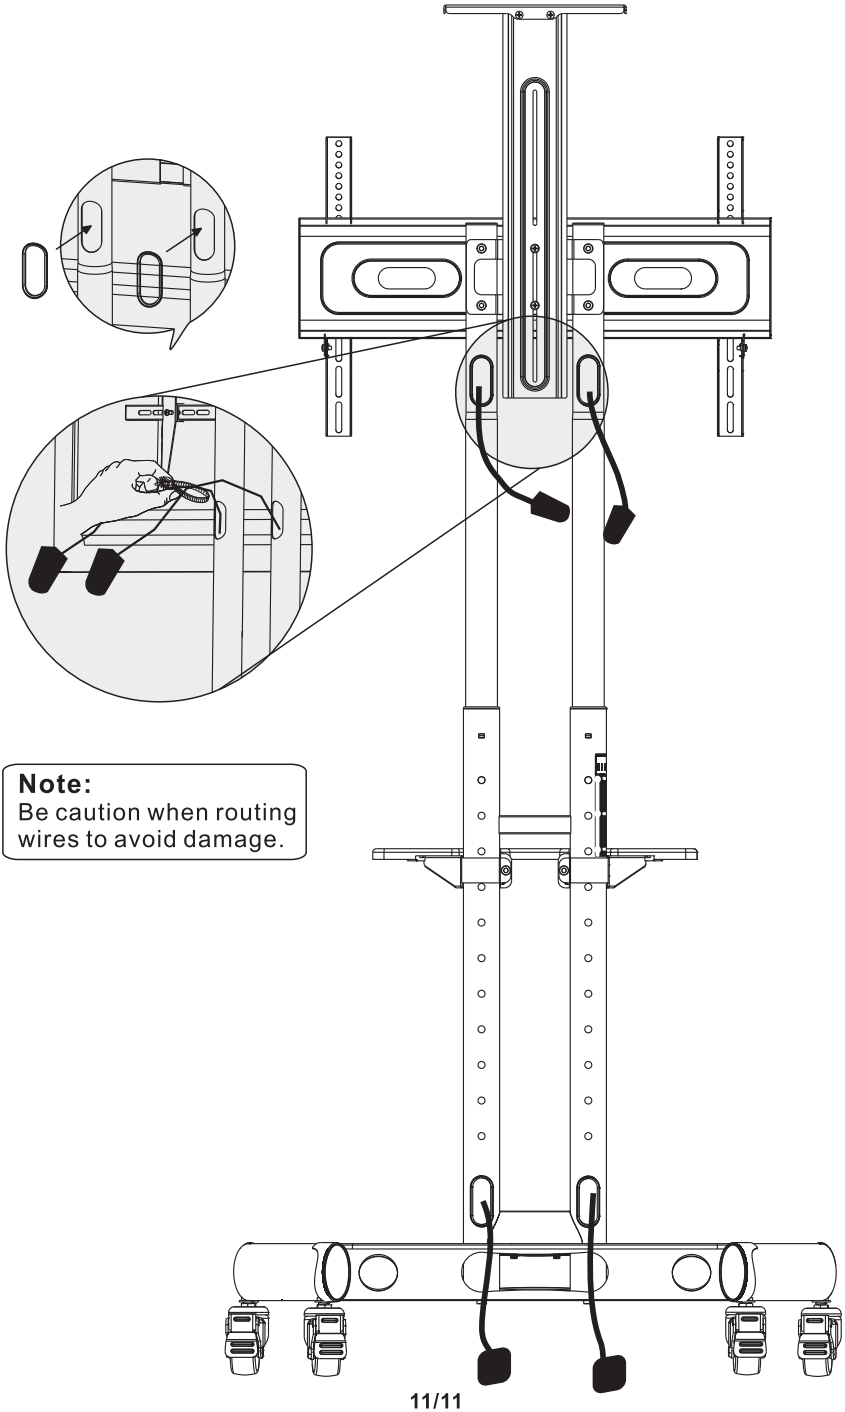

Note:
Be caution when routing wires to avoid damage.